



Waxman Ceramics
Architectural Tiles



CR


series

CRETE

unglazed porcelain stoneware
UNI EN14411
group B1a UGL



COLOURS

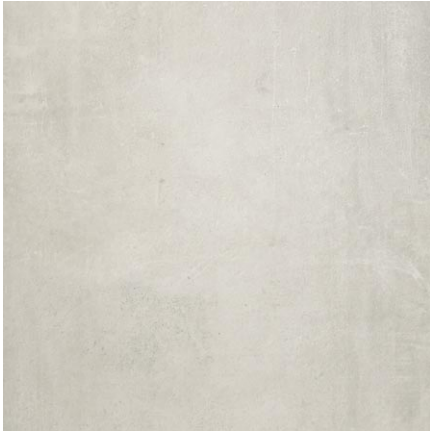

CR-205
Ziros



CR-204
Skopi



CR-203
Pompia




CR-202
Malia



CR-201
Lentas



CR-200
Armeni

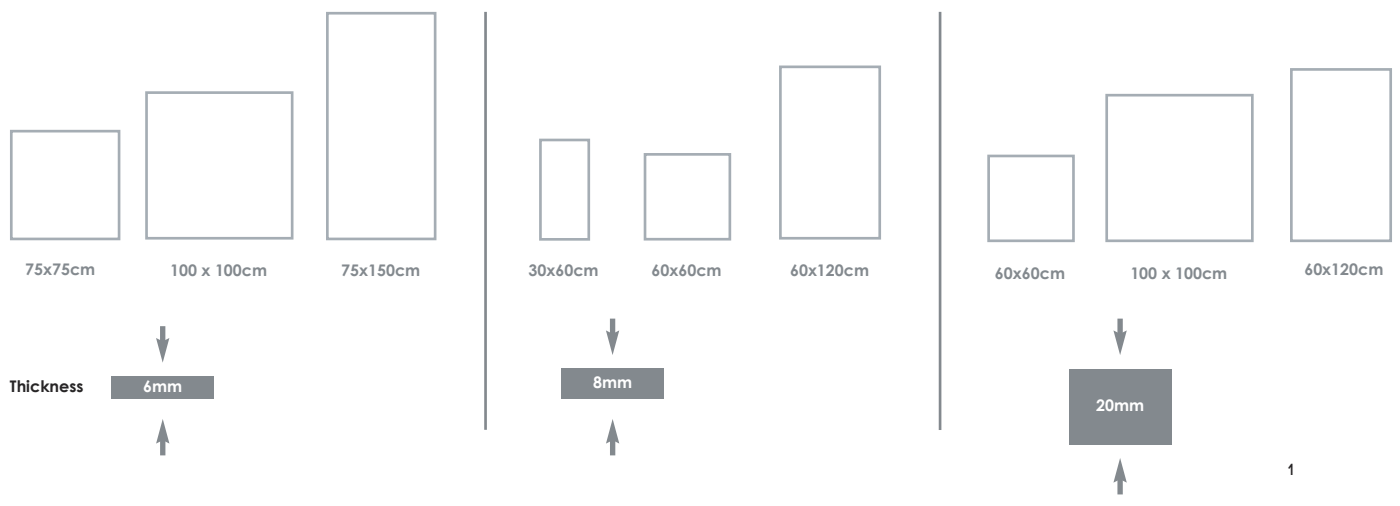

DECORS



CR-205 Ziros
Décor



CR-204 Skopi
Décor



CR-203 Pompia
Décor




CR-202 Malla
Décor




CR-201 Lentas
Décor




CR-200 Armeni
Décor

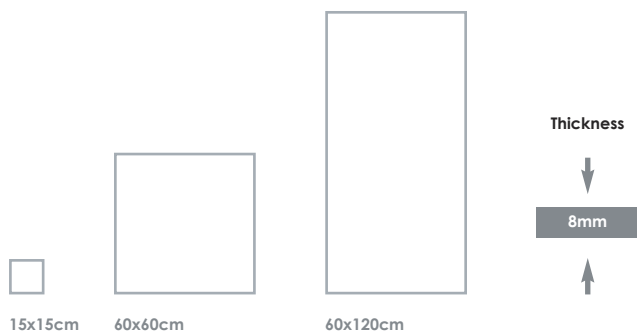

MOSAIC

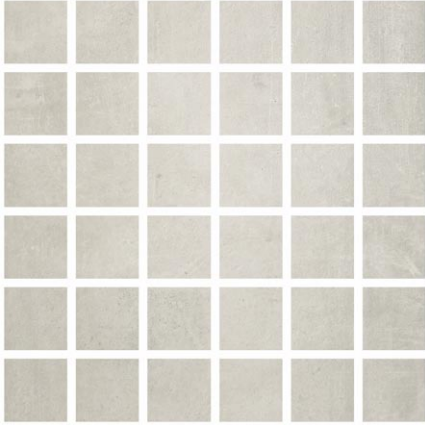


CR-205 Ziros 5x5cm Mosaic
30x30cm

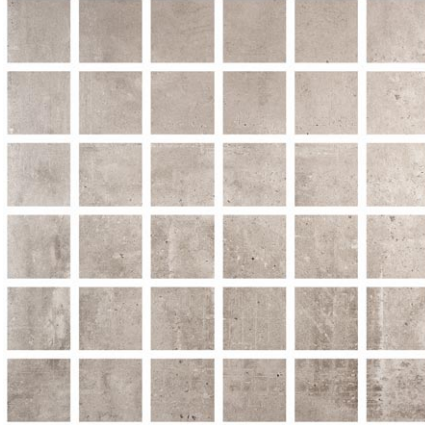


CR-204 Skopi 5x5cm Mosaic
30x30cm




CR-203 Pompia 5x5cm Mosaic
30x30cm

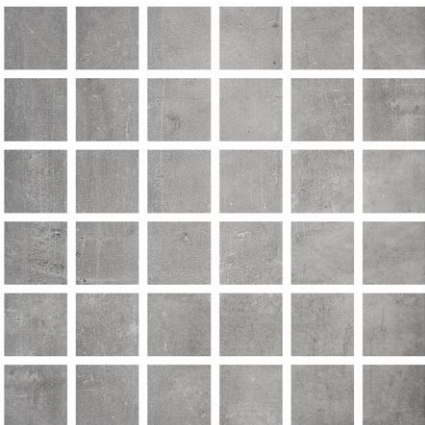


CR-202 Malla 5x5cm Mosaic
30x30cm

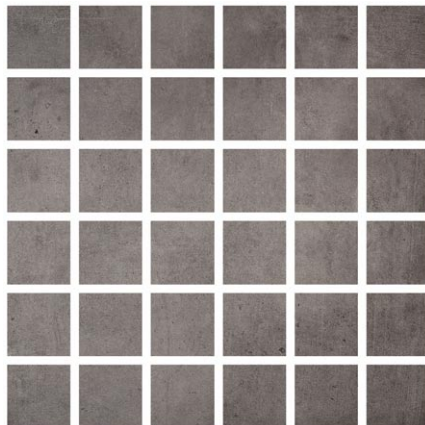



CR-201 Lentas 5x5cm Mosaic
30x30cm

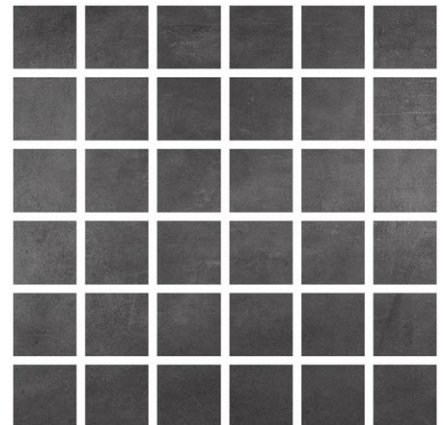

CR-200 Armeni 5x5cm Mosaic
30x30cm



SIZES

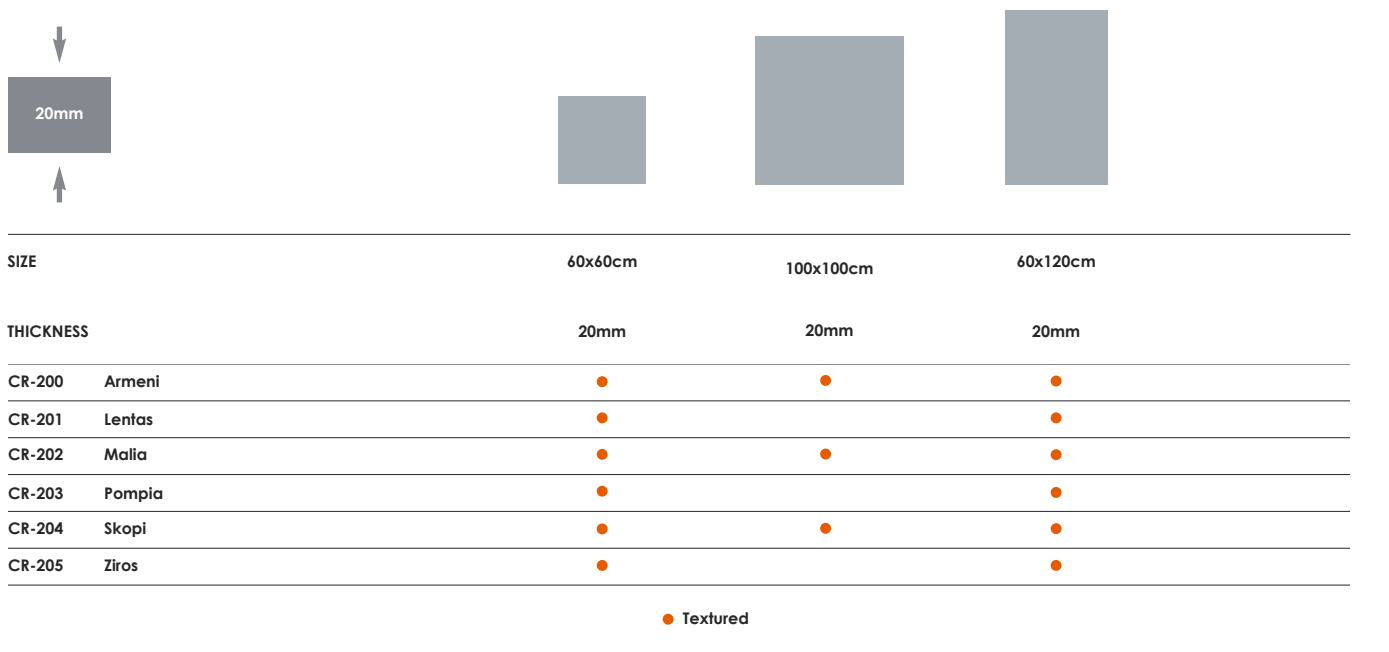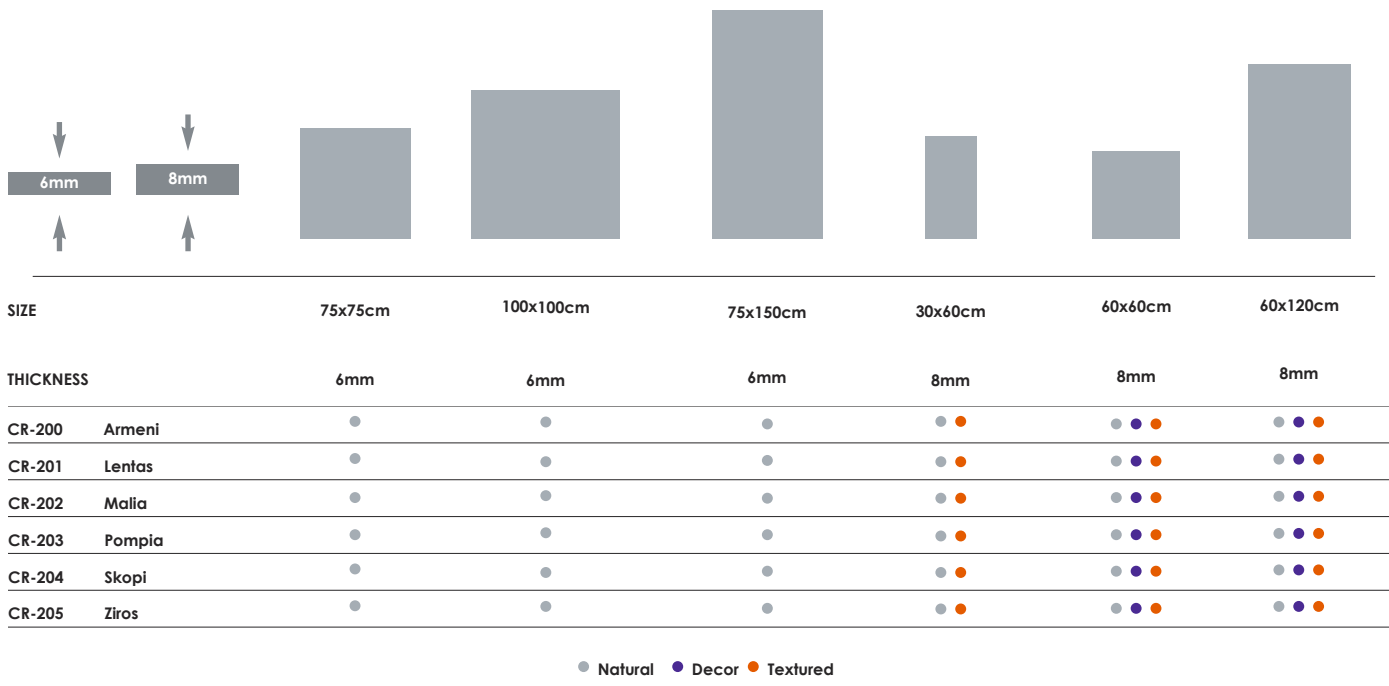

FINISHES




Natural

| Slip Resistance | | |
|-----------------|-----|-----|
| | R10 | +36 |
| | | |


Textured

| Slip Resistance | | |
|-----------------|-----|-----|
| | R11 | +36 |
| | B | |

SPECIAL PIECES



Skirting
 7x60cm, 9x75cm

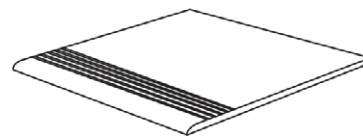

Step Edge
 30x60cm



Ziros - 75x75cm



Skopi - 75x150cm / Skopi Décor - 60x60cm



Pompia - 60x60cm / Pompia Décor - 60x60cm



Lentas - 60x120cm



Armeni - 75x150cm

TECHNICAL FEATURES

| | Norm Standards | Test results |
|--|--------------------------------------|--|
|  Product Classification | UNI EN 14411-G ISO 13006 | Group B1a UGL fully vitrified |
|  Dimensional and surface quality | UNI EN ISO 10545-2 | Length + width $\pm 0,2\%$ max Thickness $\pm 5,0\%$ Linearity $\pm 0,2\%$ Wedging $\pm 0,2\%$ Warpage $\pm 0,2\%$ |
|  Water absorption | UNI EN ISO 10545-3 | $\leq 0,5\%$ |
|  Flexural strength | UNI EN ISO 10545-4 | $\geq 42\text{N/mm}^2$ |
|  Frost resistance | UNI EN ISO 10545-12 | Frost resistant |
|  Resistance to acids and alkalis (except hydrofluoric acid) | UNI EN ISO 10545-13 | Unaffected |
|  Deep abrasion resistance | UNI EN ISO 10545-6 | 140mm ³ |
|  Linear thermal expansion | UNI EN ISO 10545-8 | 7MK ⁻¹ |
|  Stain resistance | UNI EN ISO 10545-14 | Class 5 |
|  Slip resistance | DIN 51130 DIN 51097 PTV (shod) | R10 (Natural) R11 (Textured) A + B (Textured) +36 (Natural) +36 (Textured) |
|  Light fastness | DIN 51094 | No change of colours |

Waxman Ceramics Architectural Tiles

Head Office **01422 377123**

Grove Mills
Elland
West Yorkshire
HX5 9DZ
England

London Office **020 7717 5565**

Email info@waxmanarchitectural.co.uk
Web www.waxmanarchitectural.co.uk

Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group

The information contained within this document is, to the best of our knowledge, accurate at the time of production. We reserve the right to modify this document at any time. Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide. Please refer to actual product samples before specifying or ordering.

REF: 21/04