



**Waxman Ceramics**  
Architectural Tiles



RF

series

**RAINFOREST**

unglazed porcelain stoneware  
UNI EN14411  
group B1a UGL

COLOURS



RF-17  
White



RF-11  
Grey



RF-15  
Green



RF-10  
Black



RF-13  
Beige



RF-16  
Sand



RF-12  
Brown



30x30cm



45x45cm



30x60cm




60x60cm




45x90cm

Thickness



SIZES



SIZE		45x45cm Rectified	30x60cm Rectified	60x60cm Rectified	45x90cm Rectified
THICKNESS		10mm	10mm	10mm	10mm
RF-17	White	● ●	● ●	● ●	● ●
RF-11	Grey	● ●	● ●	● ●	● ●
RF-15	Green	● ●	● ●	● ●	● ●
RF-10	Black	● ●	● ●	● ●	● ●
RF-13	Beige	● ●	● ●	● ●	● ●
RF-16	Sand	● ●	● ●	● ●	● ●
RF-12	Brown	● ●	● ●	● ●	● ●


● Natural ● Grip



SIZE		30x30cm Rectified	30x60cm Rectified	30x60cm Non Rectified
THICKNESS		9mm	9mm	9mm
RF-17	White	● ●	● ●	● ●
RF-11	Grey	● ●	● ●	● ●
RF-15	Green	● ●	● ●	● ●
RF-10	Black	● ●	● ●	● ●
RF-13	Beige	● ●	● ●	● ●
RF-16	Sand	● ●	● ●	● ●
RF-12	Brown	● ●	● ●	● ●

● Natural ● Grip

FINISHES

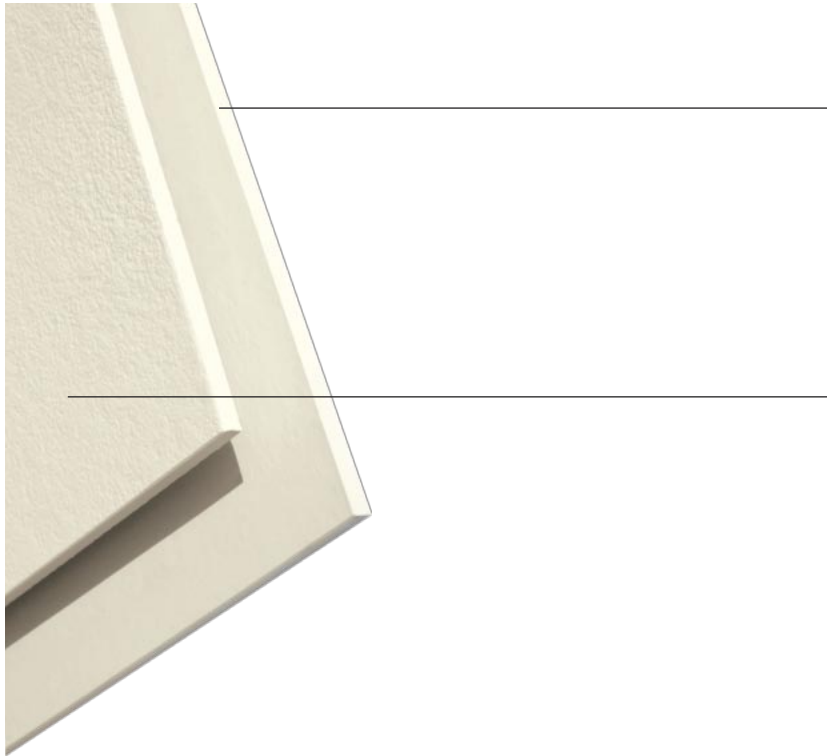

Natural

Slip Resistance		
	R10	
	A	


Grip

Slip Resistance		
	R12	+36
	C	+40


SPECIAL PIECES




**Bullnose**  
 9x45cm, 9x60cm

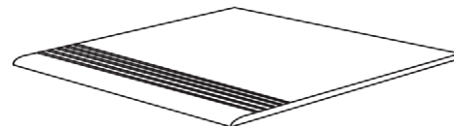


**Step Edge**  
 30x60cm, 45x45cm

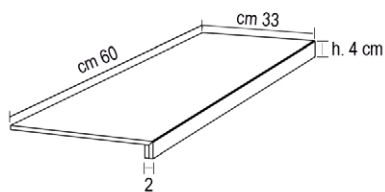

**Step Tread**  
 60x33cm

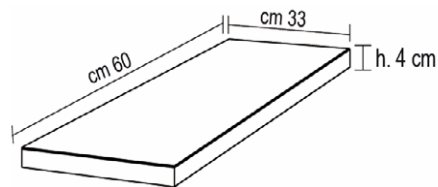

**Step Tread Corner**  
 60x33cm

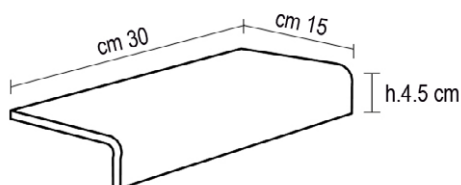

**"L" Profile**  
 15x30x4.5cm





RF-11 Grey - 45x90cm - Natural





RF-11 Grey - 45x90cm - Grip





RF-15 Green - 45x90cm - Natural





RF-10 Black - 45x45cm - Grip
















RF-12 Brown - 45x90cm - Grip



# TECHNICAL FEATURES

	Norm Standards	Test results
 Product Classification	UNI EN 14411-G ISO 13006	Group B1a UGL fully vitrified
 Dimensional and surface quality	UNI EN ISO 10545-2	Very low tolerance
 Water absorption	UNI EN ISO 10545-3	≤ 0,1%
 Flexural strength	UNI EN ISO 10545-4	N/mm <sup>2</sup> 50±60
 Frost resistance	All standards	Guaranteed
 Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	No damage
 Deep abrasion resistance		High
 Linear thermal expansion	UNI EN ISO 10545-8	6 x 10 <sup>-6</sup>
 Stain resistance		Guaranteed
 Slip resistance	DIN 51130  DIN 51097  PTV (shod) PTV (barefoot)	R10 (Natural) R12 (Grip)  A (Natural) C (Grip)  +36 (Grip) +40 (Grip)
 Light fastness	DIN 51094	No change of colours



# Waxman Ceramics Architectural Tiles

---

**Head Office**                      **01422 377123**

Grove Mills  
Elland  
West Yorkshire  
HX5 9DZ  
England

**London Office**                      **020 7717 5565**

Email              [info@waxmanarchitectural.co.uk](mailto:info@waxmanarchitectural.co.uk)  
Web                [www.waxmanarchitectural.co.uk](http://www.waxmanarchitectural.co.uk)

**Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group**

The information contained within this document is, to the best of our knowledge, accurate at the time of production. We reserve the right to modify this document at any time. Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide. Please refer to actual product samples before specifying or ordering.

REF: 21/04