




**Waxman Ceramics**  
Architectural Tiles

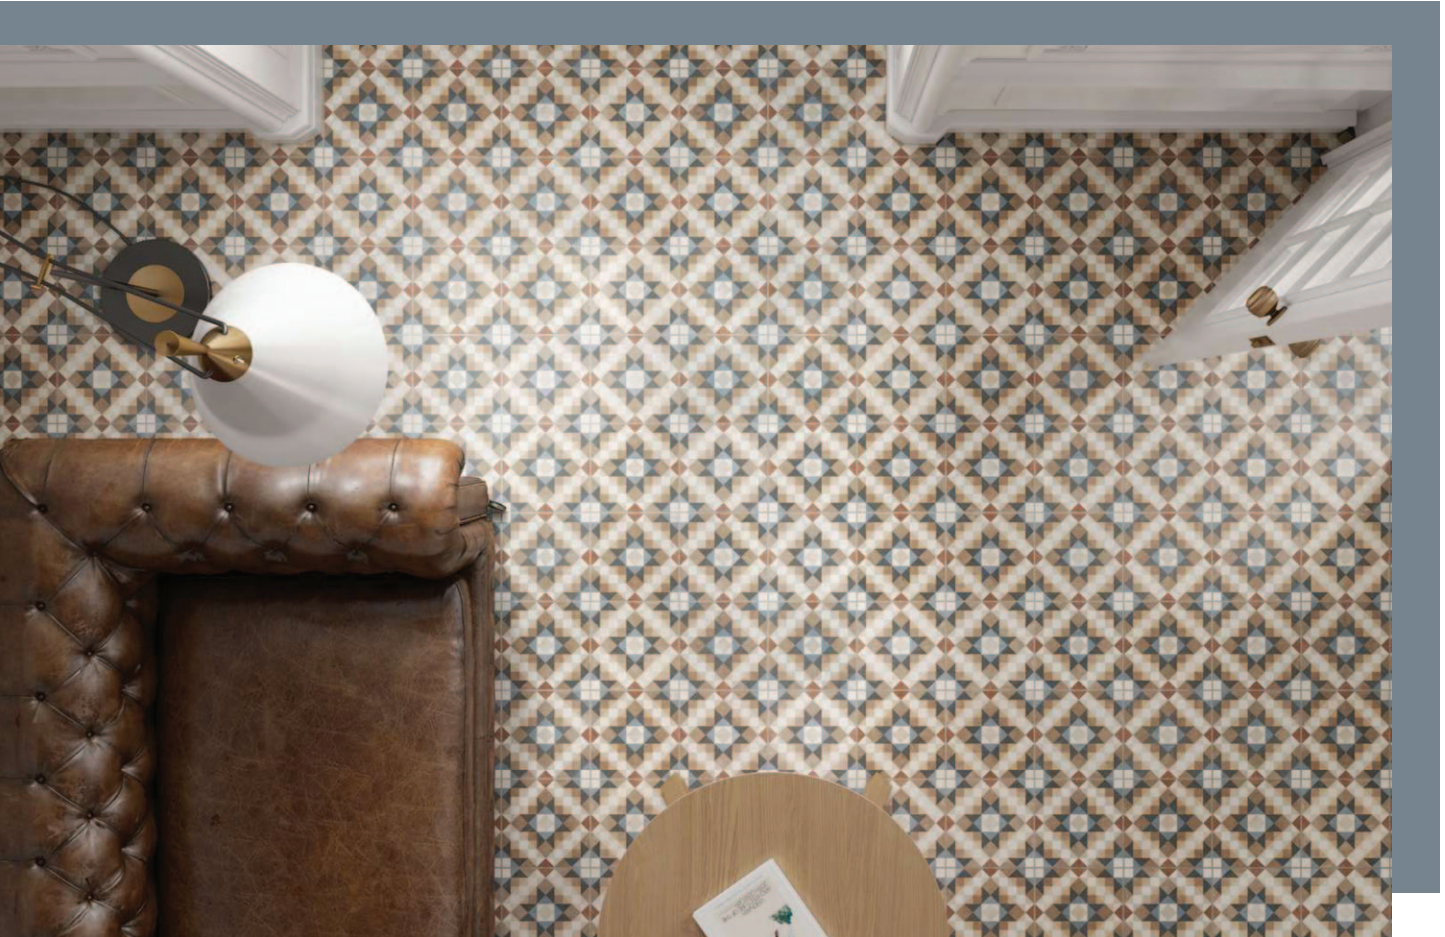

VN

**series**

**VINTAGE**

glazed ceramic floor tiles  
UNI EN14411  
Annexe J Group B11a GL



# VN Series

glazed ceramic floor tiles

# VINTAGE

## COLOURS – VINTAGE A



VN-10  
Lagoon

4



VN-21  
Casais

4



VN-22  
Monchique

4



Thickness



10.5mm



45x45cm

Slip Resistance		
	R9	+36

# VN Series

glazed ceramic floor tiles

# VINTAGE

## COLOURS – VINTAGE A



VN-25  
Marmeleite

4






VN-31  
Odemira

4



VN-35  
Moura

4

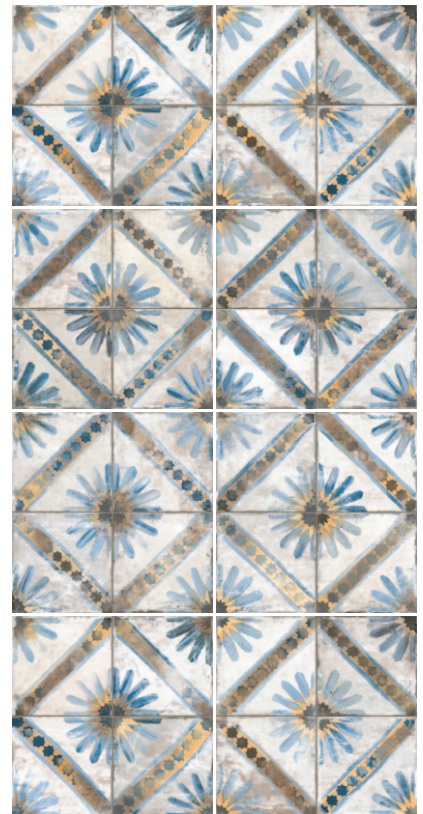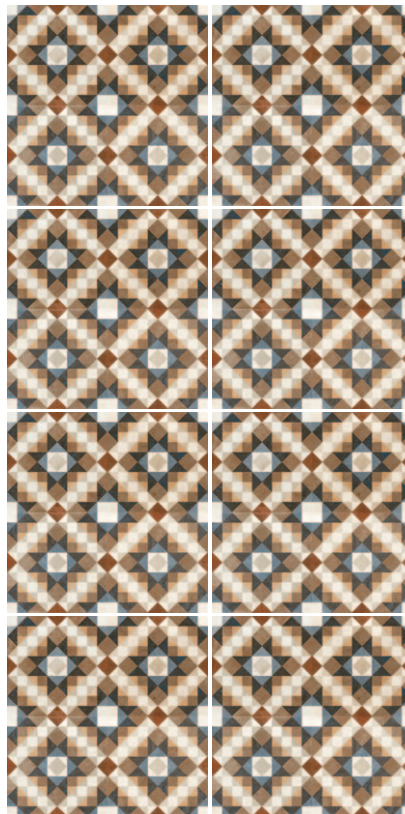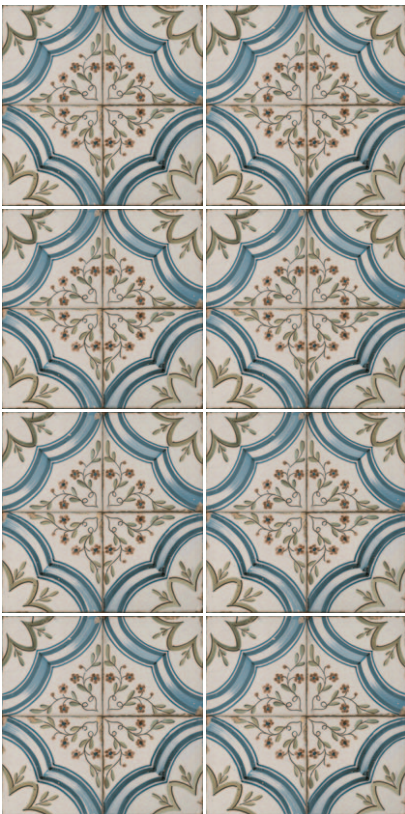

Thickness

↓

10.5mm

↑

45x45cm

Slip Resistance		
	R9	+36

COLOURS – VINTAGE B



VN-10  
Lagoa

4




VN-41  
Corchas

4



VN-44  
Oleiro

4

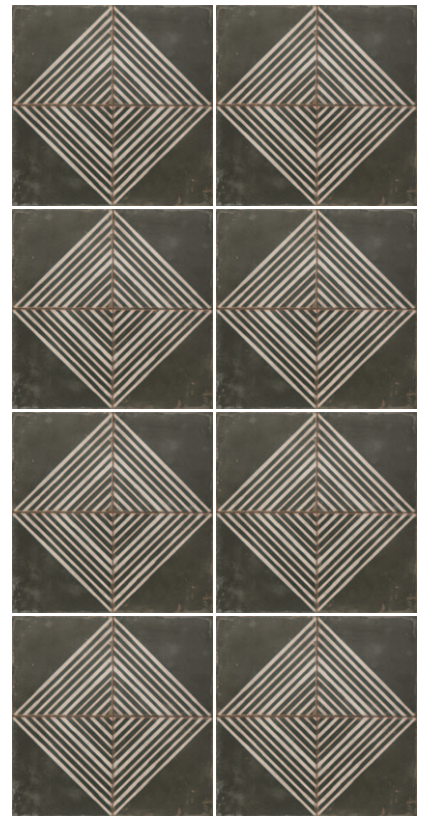

45x45cm

Thickness



Slip Resistance		
	R9	+36

COLOURS – VINTAGE B




VN-45  
Carvalho

4



VN-46  
Giraldo

4

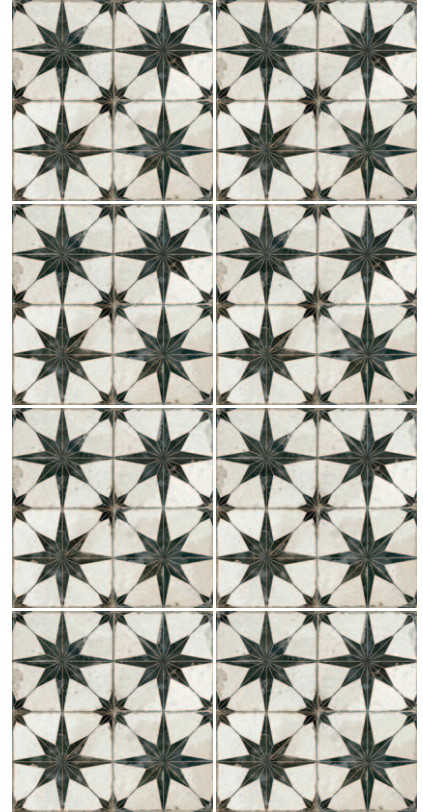

VN-47  
Mariolla

4



VN-42  
Ladeira

4

Thickness

↓

10.5mm

↑

Slip Resistance		
	R9	+36

45x45cm

# SIZES



SIZE	45x45cm
THICKNESS	10.5mm
VN-10 Lagoa	o
VN-21 Casais	o
VN-22 Monchique	o
VN-25 Marmeleite	o
VN-31 Odemira	o
VN-35 Moura	o
VN-41 Corchas	o
VN-42 Ladeira	o
VN-44 Oleiro	o
VN-45 Carvalho	o
VN-46 Giraldo	o
VN-47 Mariola	o

o Matt



VN-10 Lagoa - 45x45cm

Colour Escape  
London

Colour Escape  
London



VN-21 Cascis - 45x45cm





VN-10 Lagoa - 45x45cm / VN-22 Monchique - 45x45cm



VN-25 Marmelete - 45x45cm



VN-31 Odemira - 45x45cm



VN-35 Moura - 45x45cm



VN-41 Corchas - 45x45cm



VN-42 Ladeira - 45x45cm













VN-44 Oleiro - 45x45cm



VN-46 Giraldo - 45x45cm



# TECHNICAL FEATURES

	Norm Standards	Test results
 Product Classification	UNI EN 14411-J ISO 13006	Group B11a GL dry pressed ceramic tile
 Dimensional and surface quality	UNI EN ISO 10545-2	Length + width $\pm 0,6\%$ max Thickness $\pm 5,0\%$ Linearity $\pm 0,5\%$ Wedging $\pm 0,5\%$ Warpage $\pm 0,5\%$
 Water absorption	UNI EN ISO 10545-3	3<AA<6 %
 Flexural strength	UNI EN ISO 10545-4	> 22N/mm <sup>2</sup>
 Frost resistance	All standards	Does not resist
 Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Low concentration acids and alkalis GLA
 Resistance to surface abrasion	UNI EN ISO 10545-7	4
 Linear thermal expansion	UNI EN ISO 10545-8	$9 \times 10^{-6} \text{ K}^{-1}$
 Stain resistance	UNI EN ISO 10545-14	Class 5
 Slip resistance	DIN 51130 PTV (shod)	R9 +36

# Waxman Ceramics Architectural Tiles

---

**Head Office**                      **01422 377123**

Grove Mills  
Elland  
West Yorkshire  
HX5 9DZ  
England

**London Office**                      **020 7717 5565**

Email              [info@waxmanarchitectural.co.uk](mailto:info@waxmanarchitectural.co.uk)  
Web                [www.waxmanarchitectural.co.uk](http://www.waxmanarchitectural.co.uk)

**Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group**

The information contained within this document is, to the best of our knowledge, accurate at the time of production. We reserve the right to modify this document at any time. Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide. Please refer to actual product samples before specifying or ordering.

REF: 18/10