



Waxman Ceramics




HARMONIE

Crystal Porcelain Mosaics
25x25mm




COLOURS

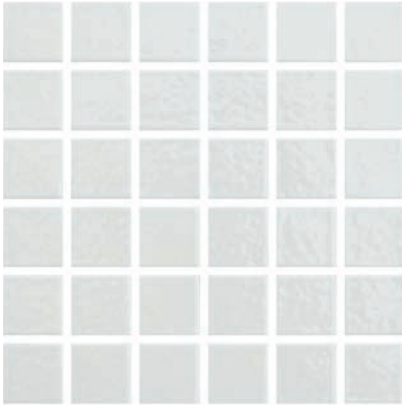


AG-1
Muguet

④

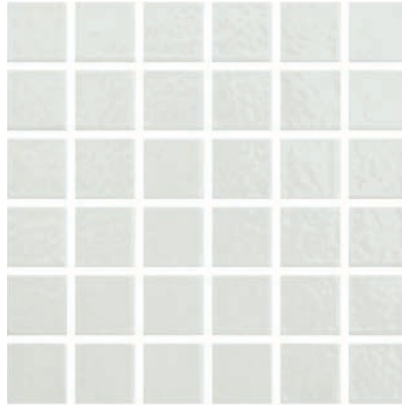


AF-3
Flores

③ A

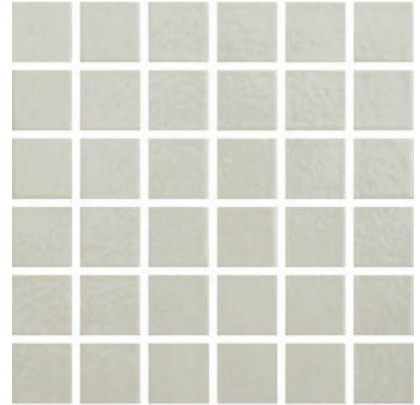


AG-2
Pierre

④ A

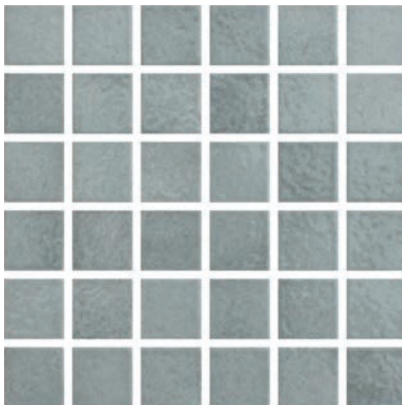


AG-4
Mouette

③

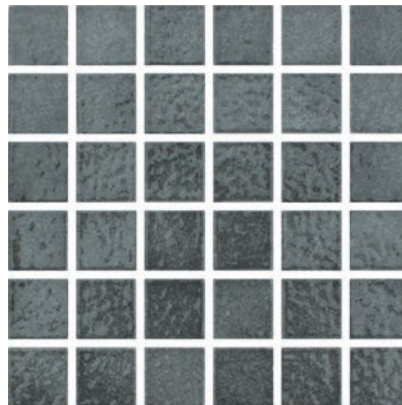

AG-36
Schiste

①

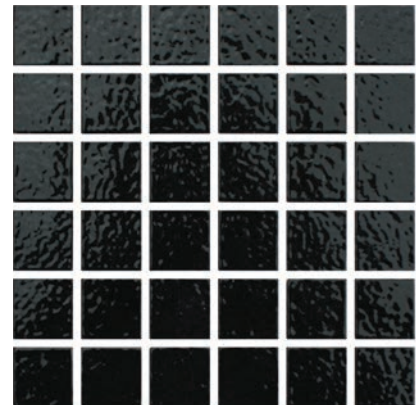


AG-11
Prunelle

A


A = Anti-Slip also available

Slip Resistance	
	R12
	C


COLOURS

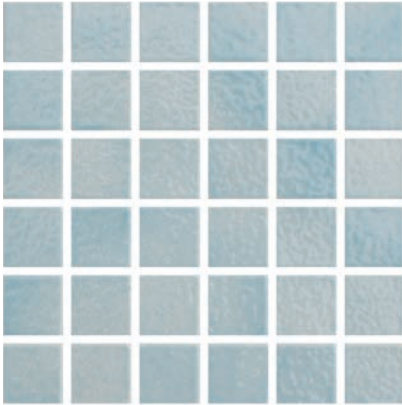


AF-4 Scilly 3 A

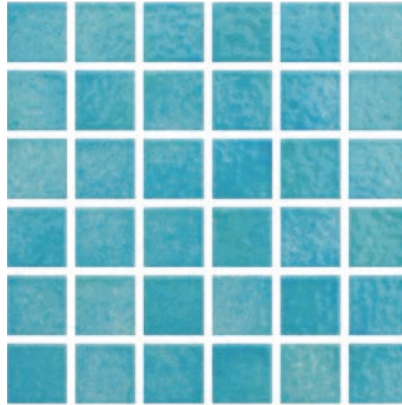


AF-1 Floride 4 A

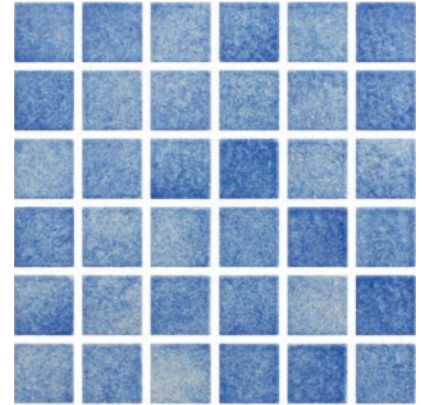


AG-18 Lavande 3 A

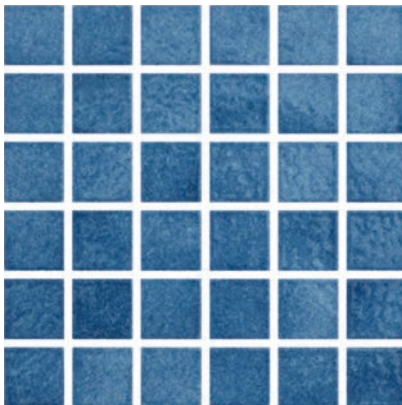


AG-5 Egee 3

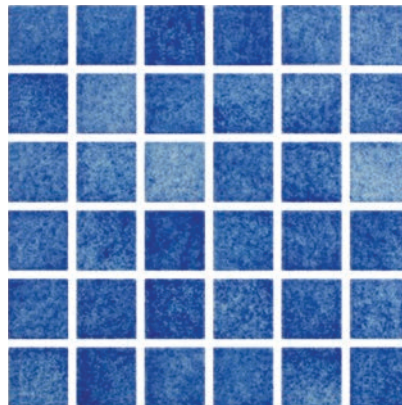


AG-34 Asler 3 A

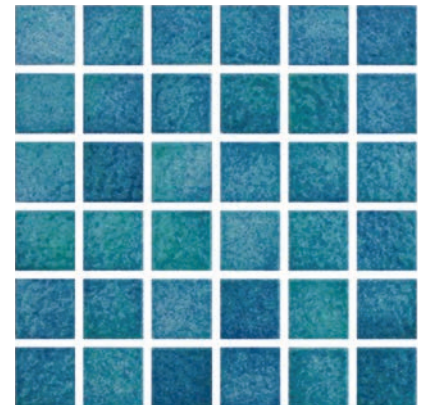

AG-32 Galapagos 3 A

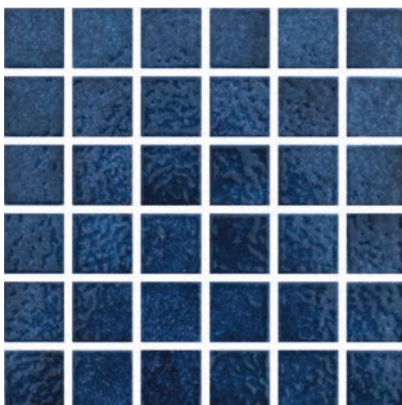

AG-6 Caraibes 1

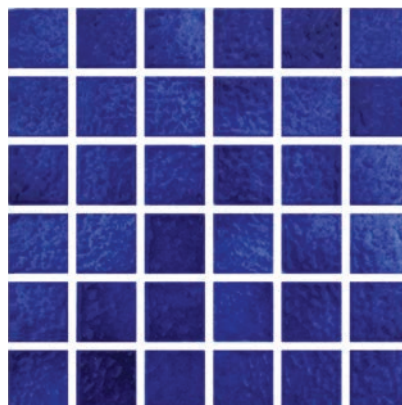


AG-33 Danube 1 A

A = Anti-Slip also available


Slip Resistance	
	R12
	C

COLOURS

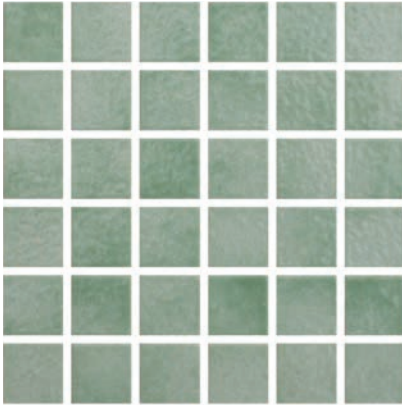


AG-3
Lotus

4 A

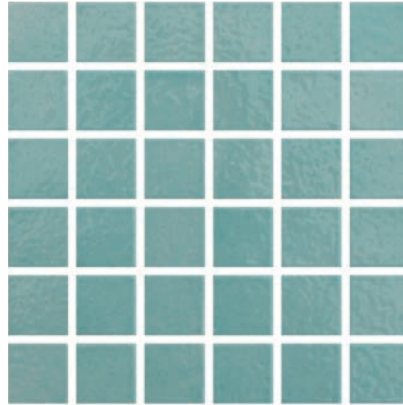


AG-17
Californie

4 A

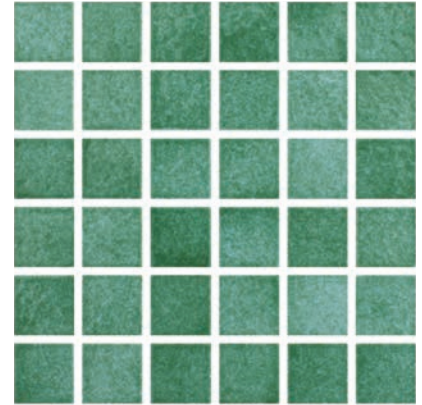


AG-24
Ivraie

3 A

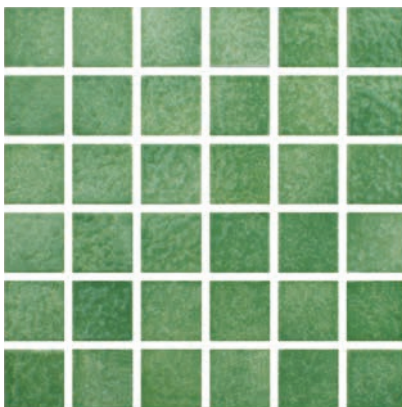


AG-21
Clairiere

4

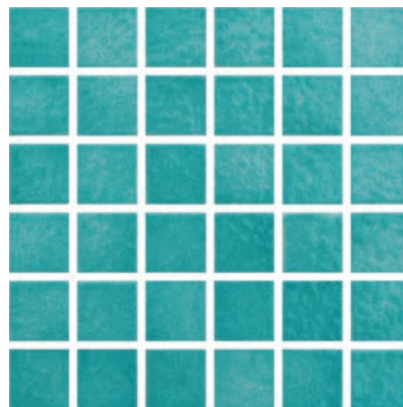


AG-75
Bahamas

3

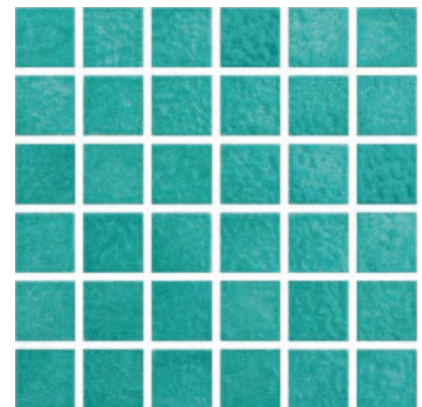

AF-2
Cipagno

4 A

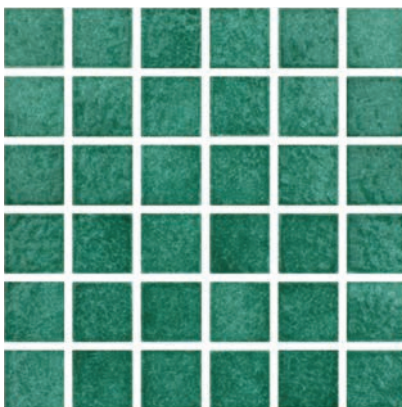

AG-31
Buis

3

A = Anti-Slip also available


Slip Resistance	
	R12
	C

COLOURS




AF-5
Orcade

④ A

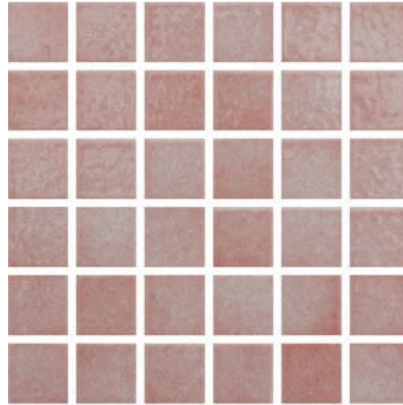


AG-71
Camelia

③

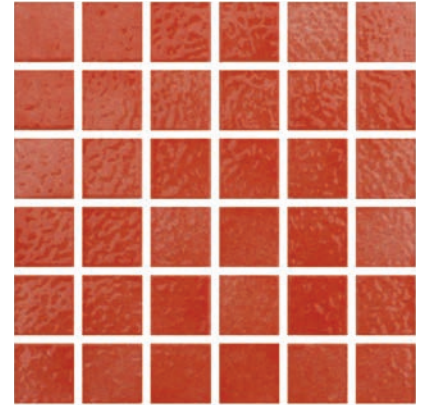


AG-70
Zinnia

①

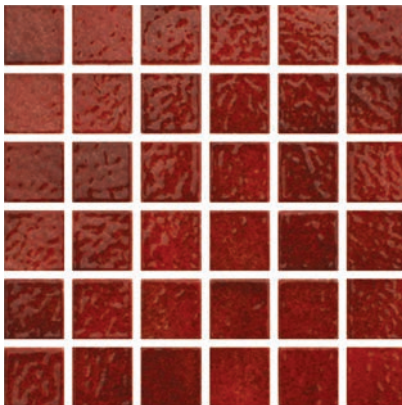


AG-16
Tulie

①

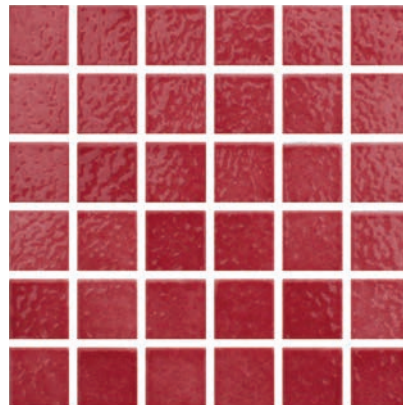


AG-37
Fuschia

①

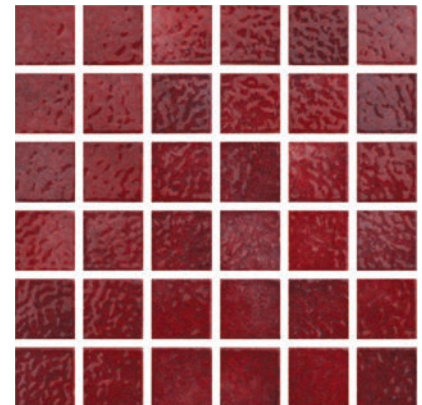

AG-30
Quetsche

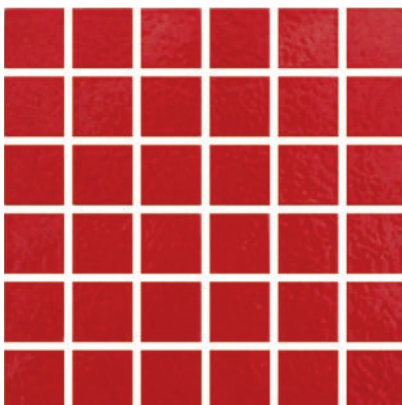

AG-23
Pivoine

A = Anti-Slip also available


Slip Resistance	
	R12
	C

COLOURS



AG-20
Gravier

④ A

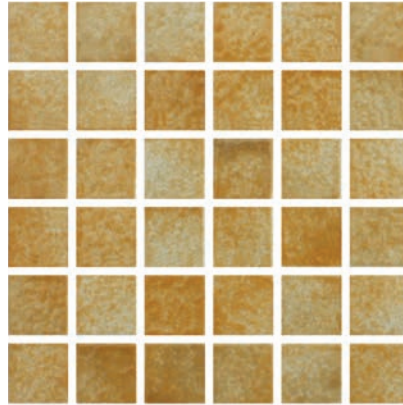

AG-13
Camel

④




AG-72
Noisetier

②




AG-10
Genet

④

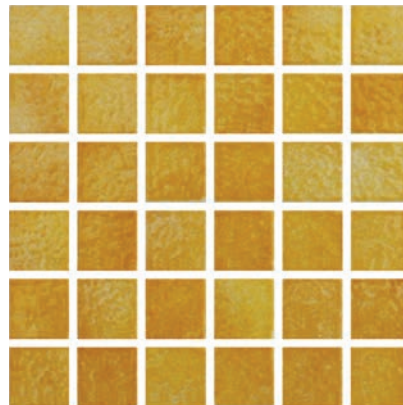

AG-22
Pollen

④

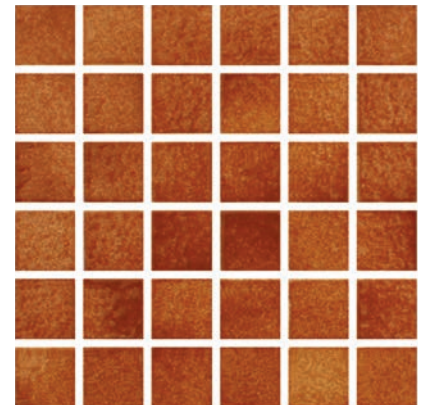

AG-35
Coriandre

③

A = Anti-Slip also available

Slip Resistance	
	R12
	C



AG-2 Pierre - 25x25mm




AG-36 Schiste - 25x25mm



AG-6 Caraiibes - 25x25mm



AG-75 Bahamas - 25x25mm

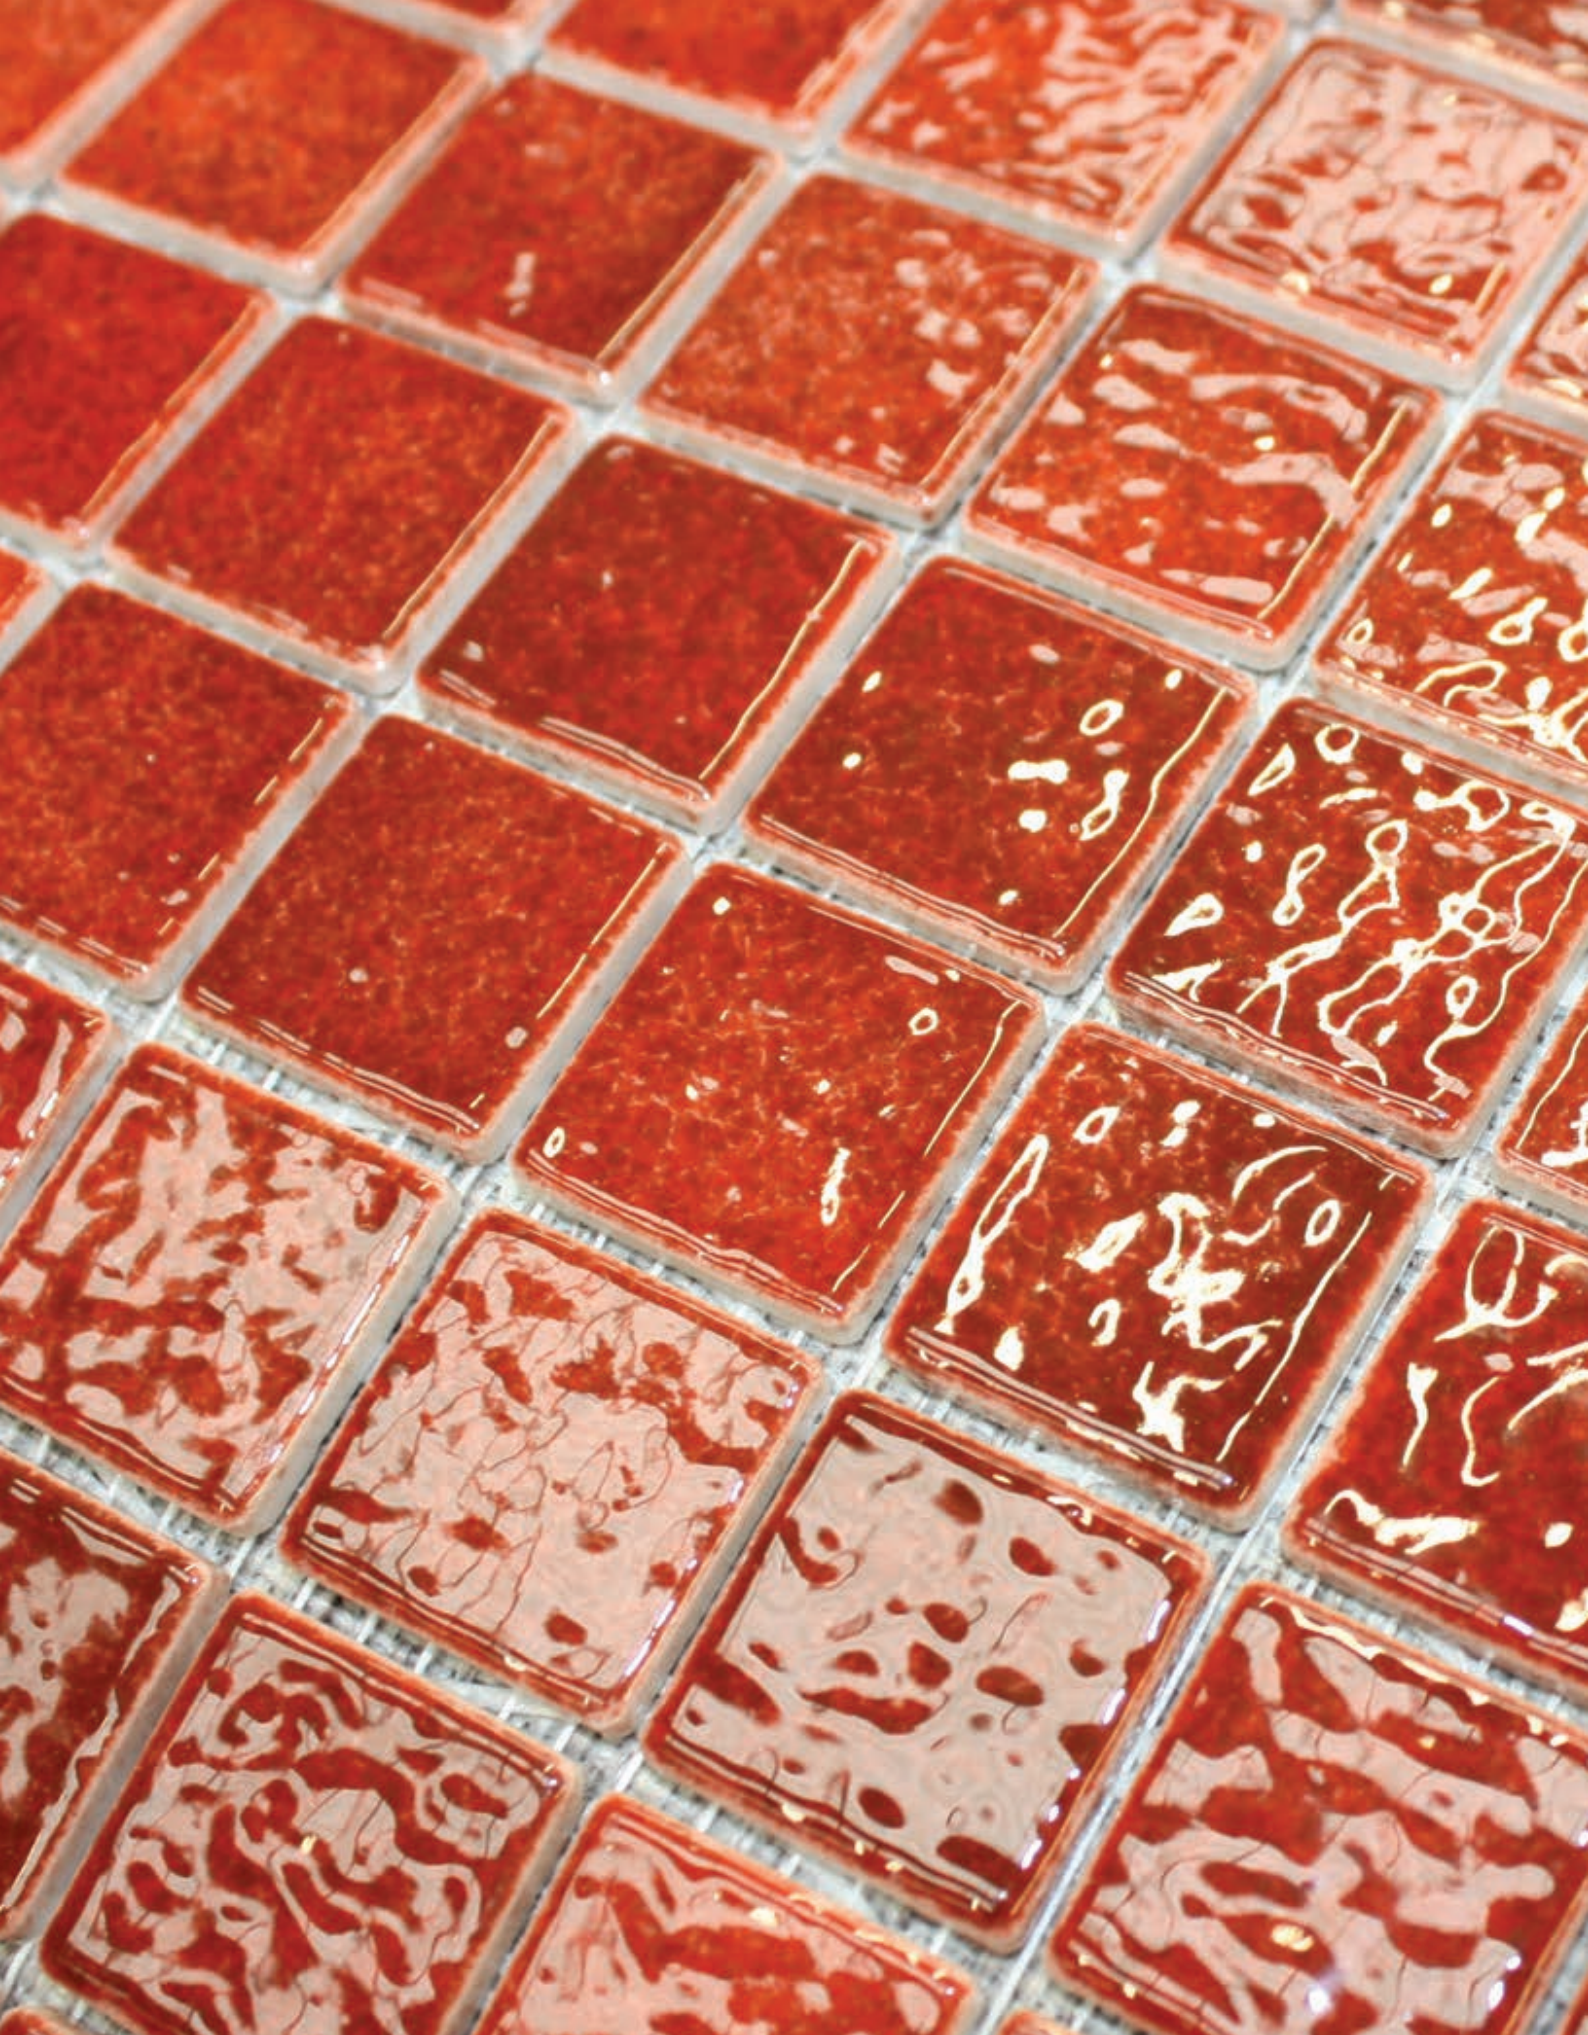

AG-16 Tulie - 25x25mm



AG-10 Genet - 25x25mm

SPECIFICATION




(Standard) Orange Peel Finish




Anti-Slip Finish

Vitrified ✓		
	Internal	External
Walls	✓	✓
Floors	✓	✗

A Anti-Slip Ratings: DIN 51097 'C'
SRV Rating 'Safe'

	
SIZE	25x25mm
THICKNESS	4mm

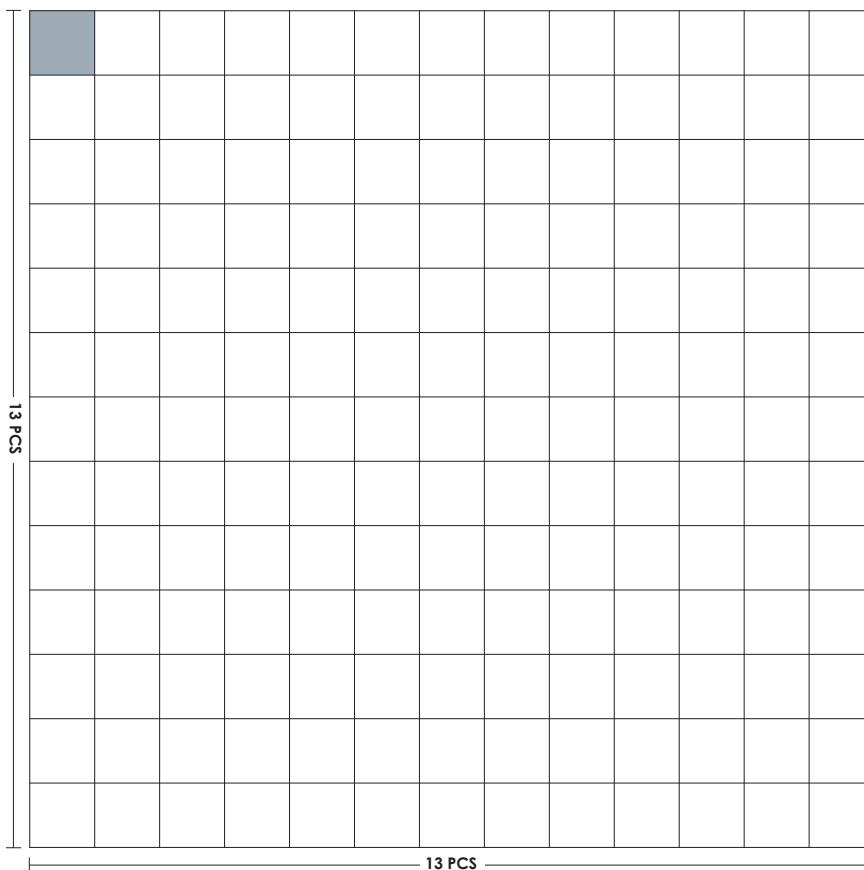

Sheet size 34.8x34.8 cm
Backing Fibre glass mesh backing

TECHNICAL FEATURES

	Norm Standards	Test results Standard Orange Peel Finish	Test results Anti-Slip Finish
 Linear thermal expansion	ISO 10545-8	92 x 10 ⁻⁷	91 x 10 ⁻⁷
 Dimensional and surface quality	ISO 10545-2	Length 25mm ± 0.2 Width 25mm ± 0.2 Thickness 4mm ± 0.1	Length 25mm ± 0.2 Width 25mm ± 0.2 Thickness 5mm ± 0.1
 Water absorption	ISO 10545-3	<0.1%	<0.1%
 Flexural strength	ISO 10545-4	>60 N/mm ²	>60 N/mm ²
 Frost resistance	ISO 10545-12	No Freezing	No Freezing
 Resistance to acids and alkalis (except hydrofluoric acid)	ISO 10545-13	Stable AA	Stable AA
 Wear and abrasion resistance	ISO 10545-6	PEI 1 to 4 See Colours	
 Thermal shock resistance	ISO 10545-9	Excellent	Excellent
 Stain resistance	ISO 10545-14	Excellent	
 Slip resistance	DIN 51130 DIN 51097		R12 C
 Light fastness	DIN 51094	Stable	

Waxman Ceramics

Head Office **01422 311331**

Grove Mills
Elland
West Yorkshire
HX5 9DZ
England

Email info@waxmanceramics.co.uk
Web www.waxmanceramics.co.uk

Waxman Ceramics Ltd - Part of the Waxman Group

The information contained within this document is, to the best of our knowledge, accurate at the time of production.
We reserve the right to modify this document at any time.
Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.
Please refer to actual product samples before specifying or ordering.

REF: 19/07