



Waxman Ceramics




NIEBLA


Glass Mosaics
25x25mm




COLOURS



PS-50
Foggy Light Blue




PS-53
Foggy Mid Blue




PS-55
Foggy Dark Blue



PS-57
Foggy Aqua



PS-60
Foggy Deep Blue




PS-61
Foggy Sapphire



Giava



PS-95
San Sebastian



PS-25
White




Anti-Slip 90° Corner Piece
50x50mm
Available in Foggy Sapphire, Black and White




Key

	Also Available with Anti-Slip Finish
	Anti-Slip Finish

COLOURS




PS-51
Foggy Blue




PS-52
Foggy Turquoise




PS-54
Foggy Black



PS-56
Foggy Moss Green



PS-58
Foggy Light Green



PS-26
Black




NT-10
Carpatos




Key

	Also Available with Anti-Slip Finish
	Anti-Slip Finish


COLOURS (Iridescent)




PS-150
Oria Mix




PS-153
Urumea Mix




PS-155
Urola Mix




PS-50 IRIS
Light Blue Iridescent




PS-53 IRIS
Mid Blue Iridescent



PS-55 IRIS
Dark Blue Iridescent




PS-163 IRIS
Bidasoa Mix



Murray



Foggy Mid Blue - 25x25mm

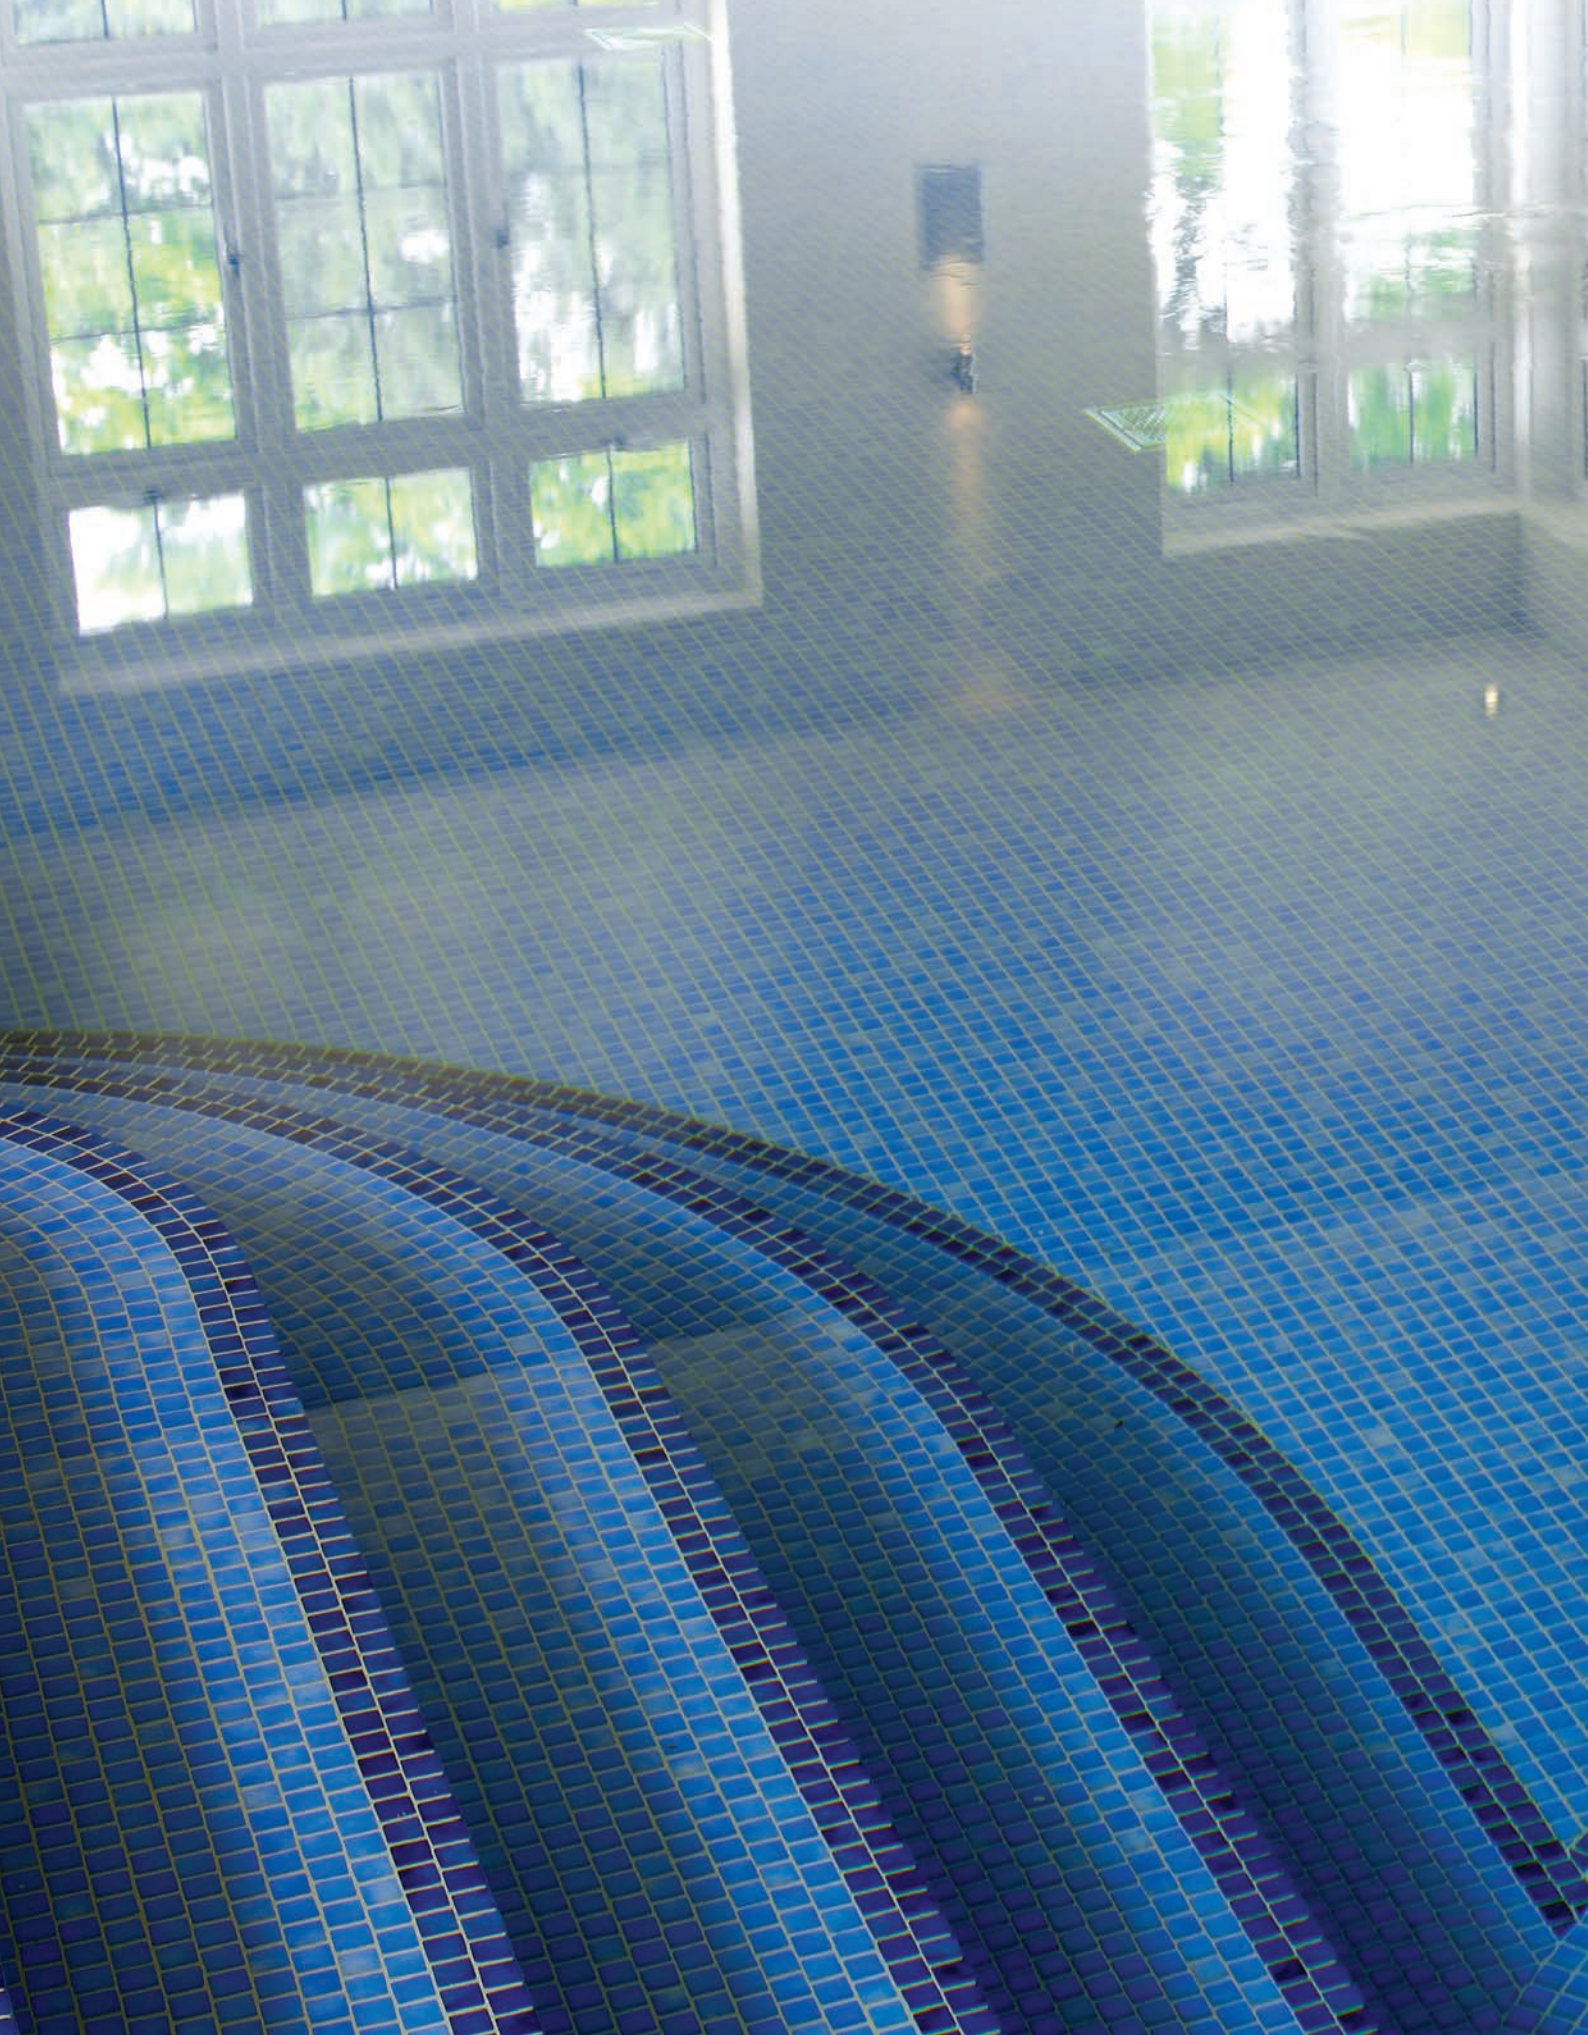

Foggy Mid Blue - 25x25mm / Foggy Dark Blue - 25x25mm



Foggy Light Blue - 25x25mm



Foggy Light Blue - 25x25mm



Foggy Mid Blue - 25x25mm



Foggy Mid Blue - 25x25mm / Black - 25x25mm



Urola Mix - 25x25mm

SPECIFICATION




Natural Finish




Anti-Slip Finish

Vitrified ✓		
	Internal	External
Walls	✓	✓
Floors	✓	✗

ⓘ Anti-Slip Ratings: DIN 51097 'C' PTV +36

	
SIZE	25x25mm
THICKNESS	5mm

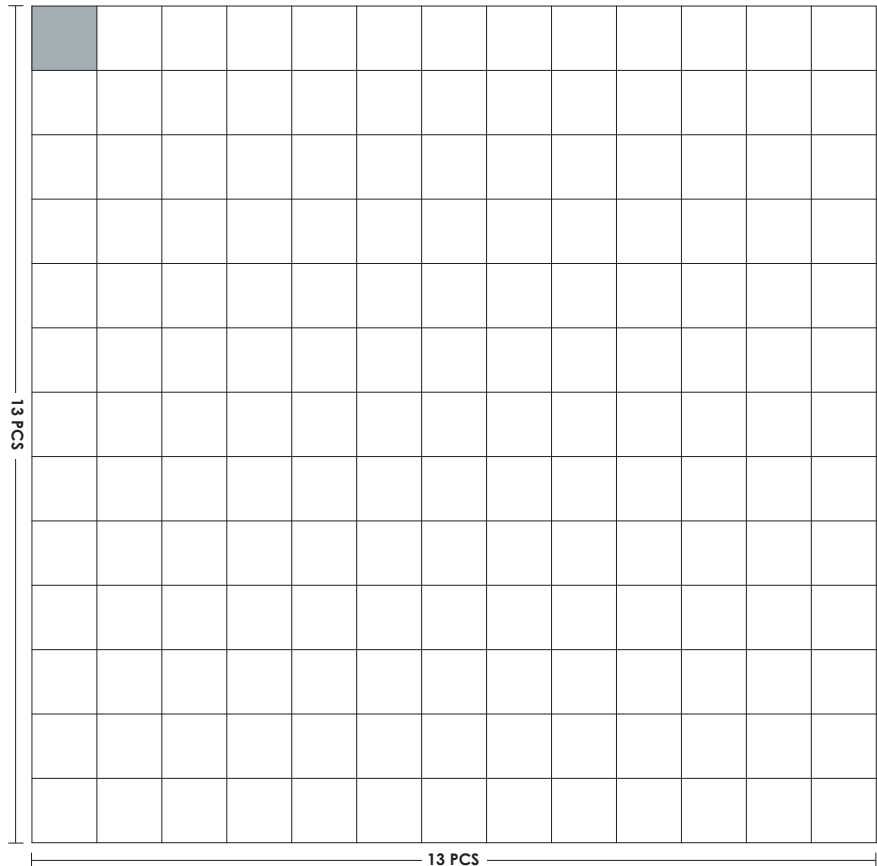










Sheet size 33.3x33.3 cm
 Backing Polyurethane cord backing

Polyurethane cord backing example:



TECHNICAL FEATURES

	Norm Standards	Test results
 Water absorption	UNI EN ISO 10545-3	None
 Frost resistance	UNI EN ISO 10545-12	Resistant
 Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Resistant
 Shock resistance	UNI EN ISO 10545-5	Resistant
 Wear and abrasion resistance	UNI EN ISO 10545-7	Resistant
 Mohs Hardness	UNI EN ISO 67.101	5
 Thermal shock resistance	UNI EN ISO 10545-9	Resistant
 Slip resistance	DIN 51097 PTV	"C" (Anti-Slip Finish) +36 (Anti-Slip Finish)
 Stain resistance	UNI EN ISO 10545-14	Resistant

Waxman Ceramics

Head Office **01422 311331**

Grove Mills
Elland
West Yorkshire
HX5 9DZ
England

Email info@waxmanceramics.co.uk
Web www.waxmanceramics.co.uk

Waxman Ceramics Ltd - Part of the Waxman Group

The information contained within this document is, to the best of our knowledge, accurate at the time of production.
We reserve the right to modify this document at any time.
Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.
Please refer to actual product samples before specifying or ordering.

REF: 17/07